

# AQUAPOD™

## Nano-Aquarium

Instructions for 24 gallon Model  
#7051

Warning and Safety Instructions .....	Page 2
Aquarium Installation .....	Page 3
Aquarium Guidelines .....	Page 5
Warranty .....	Page 6



**CURRENT**

WHAT'S NEXT

EMAIL: [INFO@CURRENT-USA.COM](mailto:INFO@CURRENT-USA.COM)  
WWW: [WWW.CURRENT-USA.COM](http://WWW.CURRENT-USA.COM)

# SAFETY INSTRUCTIONS

## WARNING

To guard against injury, basic safety precautions should be observed, including the following:

## READ AND FOLLOW ALL SAFETY INSTRUCTIONS

## DANGER

To avoid possible electric shock, special care should be taken since water is employed in the use of aquarium equipment. For each of the following situations, do not attempt repairs by yourself. Return the appliance to your retailer or discard the appliance.

- If an electrical appliance falls into the water, or water drips onto the electronics, DON'T reach for it! First unplug it and then retrieve it. If electrical components of the appliance get wet, unplug the appliance immediately.
- Always unplug appliance from an outlet when not in use, before putting on or taking off parts, and before cleaning. Never yank cord to pull plug from outlet. Grasp the plug fully and pull out to disconnect.
- Carefully examine the appliance after replacement. It should not be plugged in if there is water on parts not intended to be wet.
- Do not operate any appliance if it has a damaged cord or plug, or if it is malfunctioning or has been dropped or damaged in any manner.
- Do not use the product for anything other than its intended use. The use of attachments not recommended or sold by Current USA may cause unsafe conditions.
- Exposing power cords to water may cause electrical short and fire.
- Do not allow water or salt to come in contact with lamps or cooling fans.
- Do not operate pump without water flow to the unit. This may cause damage to the unit.

## SAVE THESE INSTRUCTIONS

## GROUND FAULT CIRCUIT INTERRUPTER PROTECTION

To comply with the National Electrical Code (NFPA 70), and to provide additional protection from the risk of shock, this unit MUST be connected to a ground fault circuit interrupter (GFCI) outlet at all times. Do not use extension cords. WARNING – To reduce the risk of electrocution, keep all connections dry and off the ground. Do not touch plug with wet hands.



**CURRENT**

WHAT'S NEXT

# AQUARIUM INSTALLATION

## ASSEMBLY INSTRUCTIONS


1. Before removing your AquaPod aquarium from the box, please note any exterior shipping damage to the box. It is strongly recommended to keep the box and packaging material in the unlikely event there is shipping damage or service is required.
2. Remove the aquarium from the box and inspect thoroughly for any signs of damage, even if the box does not show damage. If you notice any damage (broken glass, cracked lid, broken lamps, etc...) please stop and contact your dealer immediately.
3. Tilt the lid open. Remove the media located in the back of the filter and the LED transformer. Remove packaging from ceramic rings and rinse with clean water. The bioballs can remain at the bottom of the filter chamber. Set-up filter chamber as shown:

Freshwater - Recommend using sponge filter, ceramic media and bioballs.

Saltwater Fish - Recommend using sponge filter, ceramic media and bioballs.

Saltwater Reef - Recommend using sponge filter only. Live rock acts as a natural bacteria filter.

### FOAM BLOCK

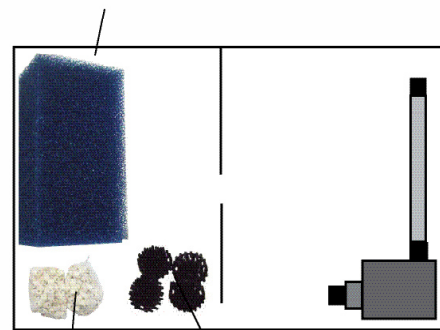

### CERAMIC MEDIA

### BIO-BALLS

#### Filter Components



Ceramic Biomedia - Used for growing bacteria. Recommended for freshwater fish and marine fish tanks.

Note: Not recommended for use in Reef Tanks due to Nitrate build-up



Bioballs - Used for growing bacteria and removing bubbles. Recommended for freshwater fish and marine fish tanks.



Sponge Filter - Used for mechanical filtering of water. Recommended for all tanks.



**CURRENT**

WHAT'S NEXT

# AQUARIUM INSTALLATION

## ASSEMBLY INSTRUCTIONS CONTINUED


4. Attach flexible tubing and elbow to pump outlet. Slide pump into the return chamber and connect outlet tube to nozzle inlet.
6. Make sure the aquarium is placed on a firm, level surface in a location that has plenty of ventilation. If placing next to a wall, allow 3"-4" of space between wall and back of tank.
7. Before turning on aquarium, ensure the following:
  - a) The powercords are plugged into a grounded GFCI outlet
  - b) Water level is above level of the submersible pump.
8. Set tank up as desired, fill with water. Inspect for any leakage or other damage.

## LIGHTING SYSTEM SET-UP

The Aquapod includes three lighting schemes:

- A. DUAL ACTINIC - Blue color light which emits a spectrum of both 460nm and 420nm blue light. SunPaq Dual Actinics provide the necessary wavelength for corals and invertebrates.
- B. DUAL DAYLIGHT - White color light which emits a spectrum of both 6,700K & 10,000K white light. SunPaq Dual Daylights provide the necessary wavelength for plants and photosynthesis. Cooling fan also works in conjunction with this light.
- C. LED LUNAR LIGHTS - Nocturnal Blue Lunar Lights are used for night-time viewing of inhabitants and aid in spawning of corals and other invertebrates.


## SWITCH CONFIGURATION



### Important Safety:

All cords **MUST** be connected all plugs into a GFCI Outlet. Do not use extension cords.

## PLUG CONFIGURATION

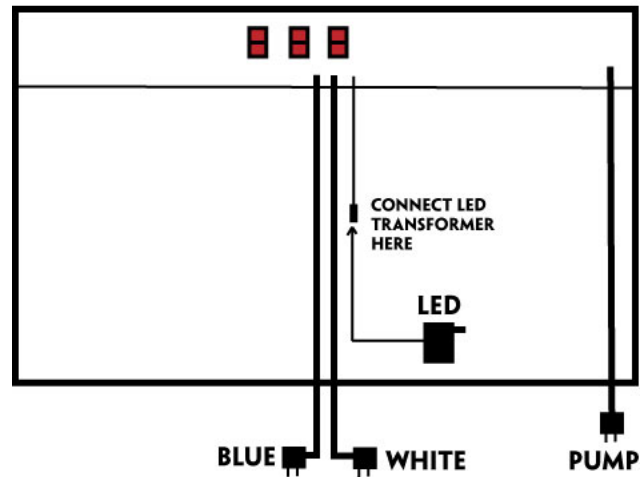

# AQUARIUM GUIDELINES

## MAINTENANCE

### **WARNING - ALWAYS UNPLUG ALL ELECTRICAL COMPONENTS WHEN PERFORMING MAINTENANCE.**

1. Cleaning of algae from inside of tank glass could be required every few days or more depending upon water quality. Always use an aquarium sponge or scraper, never use any type of soap or other cleaner.
2. Routine water changes should be done once every 2-4 weeks. A gravel siphon (purchased at the local fish store) should be used to gently clean the substrate and siphon 20% of old water. Replace with only with DECHLORINATED water. If the tank is setup as a marine tank, ensure that water being replaced is salt water at the appropriate salinity.
3. The sponge filter should be removed from the tank once every 2 weeks and gently rinsed to remove dirt and debris. Replace after cleaning.
4. If using biomedica, never wash or clean under chlorinated water. If cleaning is required, remove media from filter and place in a small bowl of DECHLORINATED water. Gently wash in bowl and replace.
5. Once every 6 months, remove pump and clean inside impeller. Bacteria can often build-up and slow flowrate down.
6. Once per year, remove and replace compact fluorescent lamps. Always replace using SunPaq brand lamps to ensure the high lumen output required for most organisms.

## TIMER SUGGESTIONS

Proper timing schedules are important if a 24 hour "Dawn to Dusk" effect is desired. The following schedule for the lights is suggested:

LED Light - 24 hours per day  
Dual Actinic - 13 hours per day  
Dual Daylight - 11 to 12 hours per day

Example Timer Program (7 days per week)

LED Light - leave on 24 hours per day  
Dual Actinic - Turn on at 7 am  
Dual Daylight - Turn on at 8 am  
Dual Daylight - Turn off at 7 pm  
Dual Actinic - Turn off at 8 pm



**CURRENT**

WHAT'S NEXT

# WARRANTY

## CURRENT USA, INC. ONE-YEAR LIMITED WARRANTY

Current USA, Inc. warrants this product against defects in materials and workmanship of a period of ONE (1) YEAR from the date of original retail purchase. Light Bulbs carry a 3 month warranty.

Warranty on all Products, including Aquariums, is limited to replacement of the product and does not cover fish loss, personal injury, property loss or direct, incidental or consequential damage arising to the use of this product.

Note: Current-USA, Inc. One-Year Limited Warranty does not cover damage caused by the following: Improper installation, saltwater corrosion, and electrical surges.

If you discover a defect, Current USA, Inc. will, at its option, repair or replace the product at no charge to you, provided you return it during the warranty period. It is required that you present this warranty card and a copy of the bill of sale as proof of original purchase date, in the event the product needs repairs, within the warranty period. Please see your dealer for return options. This warranty applies only to products by or for Current USA, Inc. that can be identified by trade name, or logo affixed to them. Current-USA, Inc. does not warrant any products that are not Current-USA, Inc. products. This warranty does not apply if the product has been damaged by accident, abuse, misuse or misapplication or if the product has been modified without the written permission of Current-USA, Inc.; or if any Current-USA, Inc. logos have been removed or defaced.

THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. Current USA, Inc. SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DOWNTIME, GOODWILL, DAMAGE TO OR REPLACEMENT OF EQUIPMENT AND PROPERTY, AND ANY COSTS OF RECOVERING ANIMALS, PLANTS, TANKS OR OTHER AQUARIUM RELATED ITEMS AND/OR EQUIPMENT. Current USA, Inc. IS NOT RESPONSIBLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY, OR REPLACEMENT OF EQUIPMENT OR PROPERTY, OR ANY COSTS OF RECOVERING OR REPRODUCING ANY EQUIPMENT, ANIMALS OR PLANTS USED OR GROWN WITH Current USA, Inc. PRODUCTS.

Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages or exclusions of implied warranties, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from jurisdiction to jurisdiction.